



ComAnt[®] Communications Antennas

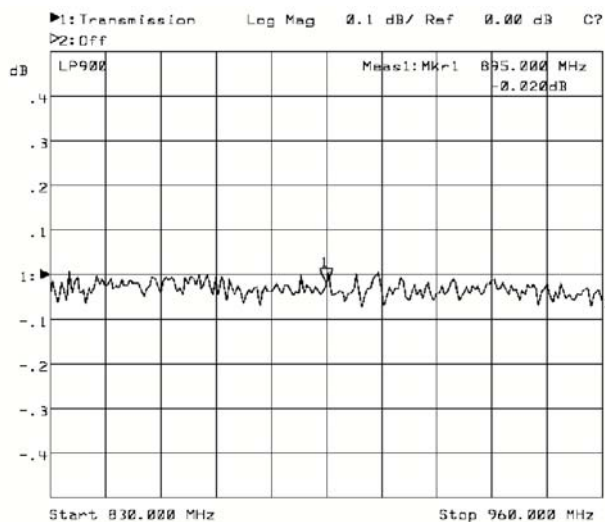

FREQUENCY INDEPENDENT DATA

Description: lightning protector, quarter wave shorting stub
 Frequency: 70-90 MHz, 144-176 MHz, 210-250 MHz, 380-475 MHz, 830-960 MHz, 2300-2500 MHz
 Impedance: 50 ohm
 Connector: N-female - N-male, TNC-female - TNC-male
 VSWR: < 1.2
 Attachment: M8
 Temperature: -40° - +80°C
 IP: 67 (LP-N)
 62 (LP-TNC)

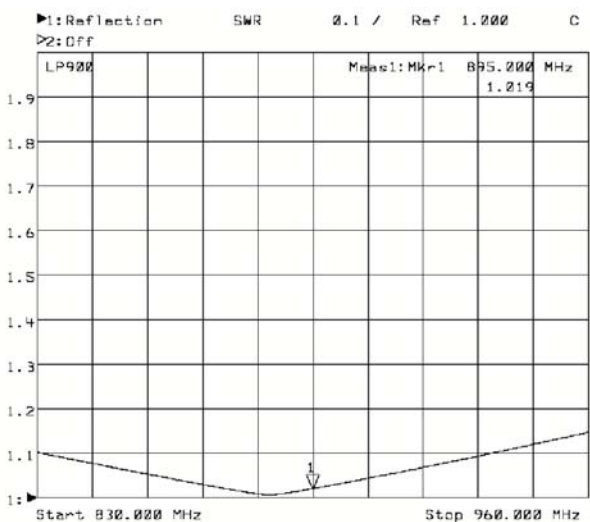

Induo AB
08-659 43 00
 info@induowireless.com
 www.induowireless.com
 Rökerigatan 19
 121 62 Johanneshov

CompleTech
 ComAnt[®] -antennas by CompleTech, Finland

LIGHTNING PROTECTOR

LP