


ComAnt[®] Communications Antennas

FREQUENCY INDEPENDENT DATA

Description: lightning rod support,
protective cone according to
DIN V VDE 0185

Connector: 1 x 16 mm² - 2 x 25 mm²
Attachment: Ø 35-60 mm, aluminium alloy
bracket, stainless steel V-
bolts and self locking nuts

Temperature: -40° - +80°C

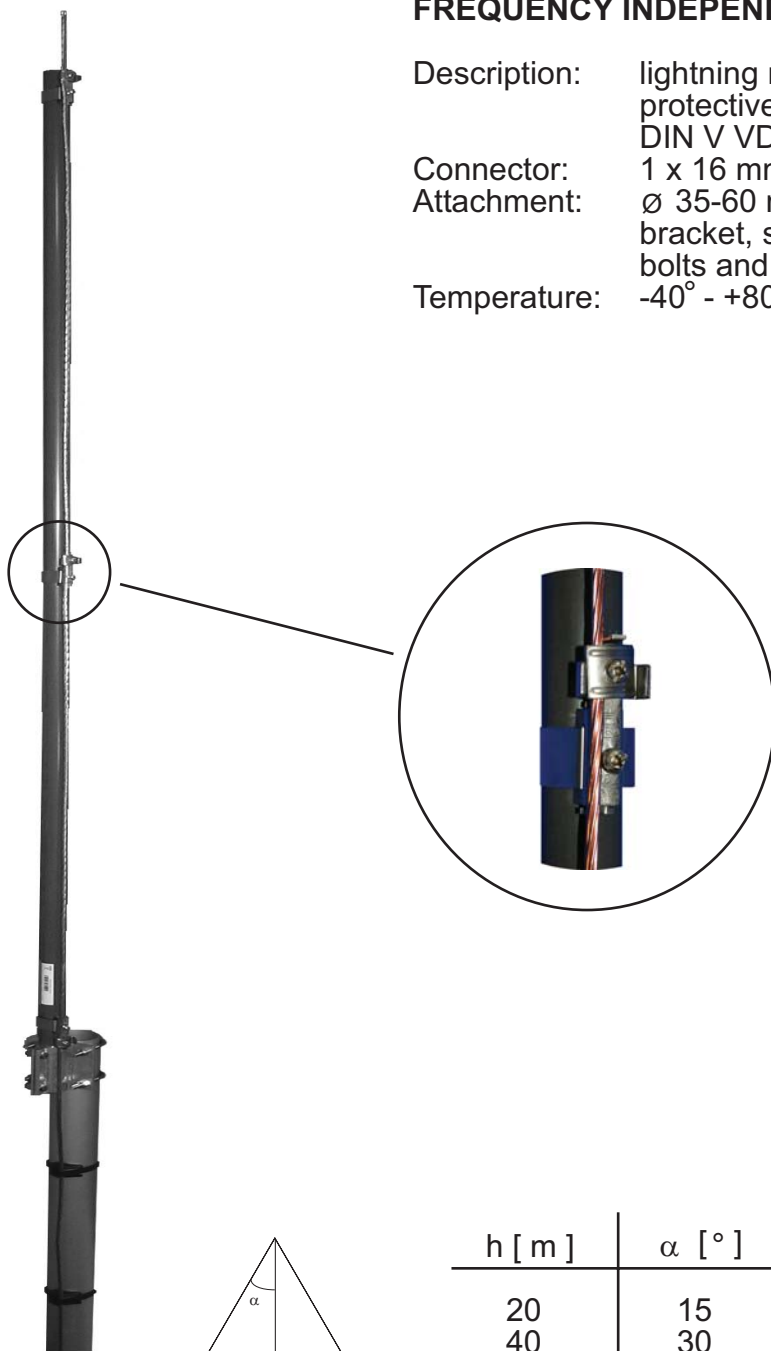

h [m]	α [°]
20	15
40	30
60	45

LR LIGHTNING ROD SUPPORT



Induo AB

08-659 43 00

info@induowireless.com

www.induowireless.com

Rökerigatan 19

121 62 Johanneshov

CompleTech
ComAnt[®] -antennas by CompleTech, Finland